



WALP

LED WALL PACK LIGHTS



Field Configurable:

The WALP LED Wall Pack offers fully customizable lighting with adjustable wattage and Kelvin temperature, providing precise illumination tailored to your needs. Its versatility makes it an ideal solution for entryways and small-area applications.

Integrated Photocell:

Equipped with a built-in photocell, this fixture automatically responds to ambient light conditions, optimizing energy efficiency by reducing unnecessary operation.

Anti-Glare Lens:

Designed with a diffused lens, this fixture minimizes glare while delivering clear, comfortable lighting. Its performance is especially effective at low mounting heights of 6–10 feet, ensuring safe and efficient illumination in compact spaces.

PRODUCT DESCRIPTION

WALP LED Wall Pack is a compact, high-performance lighting solution for entryways and small spaces. Available in White and Bronze finishes, it delivers glare-free illumination with its diffused acrylic lens, ensuring reduced reflections and enhanced visual comfort.

Project: _____ Date: _____

Catalog #: _____

Notes: _____



PERFORMANCE OVERVIEW

Wattage Adjustable: 8W, 12W or 15W and 15W, 20W, 30W
 Lumen Output: 1,901 Lumens and 3,724 Lumens
 Efficacy (lm/W): Up to 130 Lumens per Watt
 Kelvin Adjustable: 3000K, 4000K or 5000K
 IP Rating: IP65
 CRI: >80

CONSTRUCTION

- Precision Die-Cast Aluminum Housing
- Weathertight LED Driver Housing
- Continuous Gasket Seal
- Weight: 2.29lbs

ELECTRICAL


- Input Voltage Options: 120-277 VAC
- Life: >60,000 hours
- Dimming: 0-10V Dimmable
- Operating Temperature: -40°F to 113°F (-40°C to 45°C)

OPTICAL

- Precision Engineered Optical Lens
- Diffused Acrylic Impact Resistant Lens
- UV Protection

KEY FEATURES & BENEFITS:

- Two-piece Aluminum Housing with Easy Driver
- Comes Standard with Photocell
- Photocell offers quick disconnect if not needed
- 0-10V dimming • Kelvin Adjustable (3000K, 4000K, 5000K) • Wattage Adjustable - Two Models
 - 8 Watt | 12 Watt | 15 Watt
 - 15 Watt | 20 Watt | 30 Watt

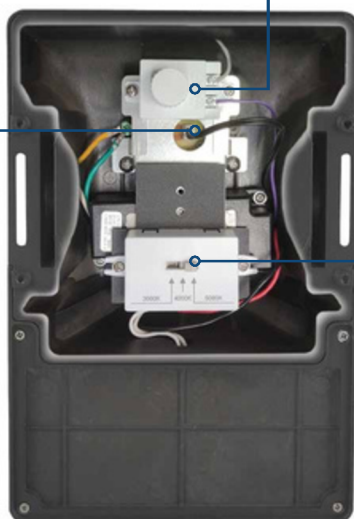

**ADJUSTABLE
KELVIN & WATTAGE**



Available in Bronze or White Finishes

ORDERING GUIDE

AF	-	MWP	-	WATTAGE	-	1	-	KELVIN	-	
AF		TYPE		WATTAGE ADJUSTABLE*		GENERATION		KELVIN ADJUSTABLE*		FINISH
		MWP (Mini Wall Pack)		8W 12W 15W 15W 20W 30W		1 (1st Generation)		(3000, 4000, 5000 Kelvin)		BZ (Bronze) WH (White)

* Default fixture settings are set to highest wattage and 5000K

CATALOG DATA


AF	TYPE	WATTAGE	GENERATION	KELVIN ADJUSTABLE					
				3000K (30)			4000K (40)		
				LUMENS*	LPW	DLC QPL	LUMENS*	LPW	DLC QPL
AF22XESL-MWP-0815W-1				1,901	130	PLTGVQTC1Q26	1,901	130	PLTGVQTC1Q26

* Lumens shown are at highest wattage output

AF	TYPE	WATTAGE	GENERATION	KELVIN ADJUSTABLE					
				3000K (30)			4000K (40)		
				LUMENS*	LPW	DLC QPL	LUMENS*	LPW	DLC QPL
AF22XESL-MWP-1530W-1				3,724	131	PLOSY5F7JQTI	3,724	131	PLOSY5F7JQTI

* Lumens shown are at highest wattage output

DIMENSIONS

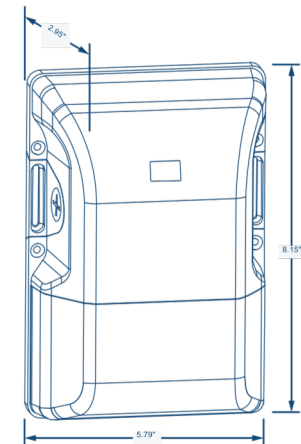

ELECTRICAL LOAD - STANDARD VOLTAGE

SYSTEM WATTS	INPUT CURRENT				INPUT VOLTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC						
8	0.07	0.04	0.03	0.03	120-277 VAC	50/60 Hz	≥0.9	≤20 %	-40°F to 113°F (-40°C to 45°C)	0-10V
12	0.10	0.06	0.05	0.04						
15	0.13	0.07	0.06	0.05						
20	0.17	0.10	0.08	0.07						
30	0.25	0.14	0.13	0.11						

LIGHT DISTRIBUTION

