




TEME

LANTERN STYLE WALL PACK LIGHT

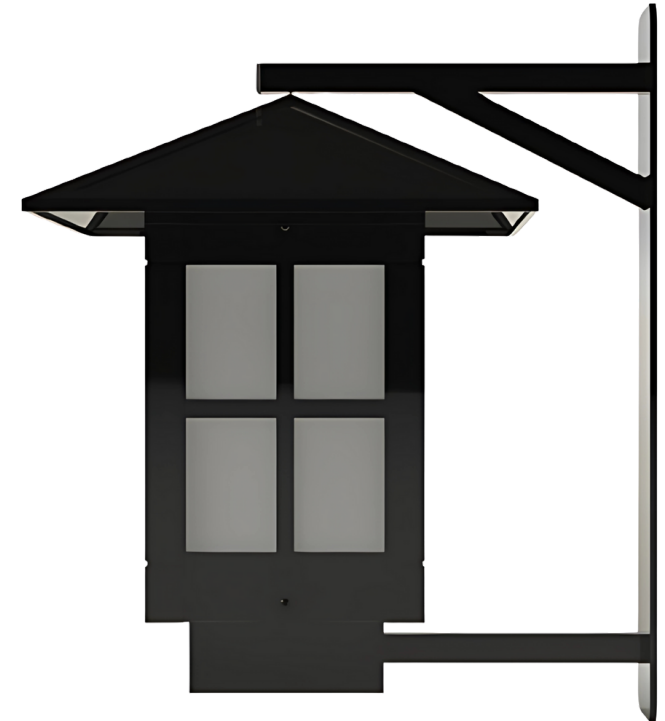

SPECIFICATION GRADE:

Built to your specifications, TEME offers unmatched flexibility with a wide range of styles, wattages, finishes, optics, and Kelvin options—delivering tailored performance that aligns perfectly with your project vision.

PRODUCT FAMILY:

TEME is a versatile solution designed to meet the unique demands of any project. Available in multiple style variations—post-tops, wall mounts and pendants, TEME ensures a cohesive look across varied environments.

EXTREME-LIFE with LED Efficiency

Powered by advanced LED technology, TEME offers an EXTREME-LIFE L70 rating of 225,000 hours, IP66 protection, and a super durable powder coat finish for long-lasting, low-maintenance performance.

PRODUCT DESCRIPTION:

TEME luminaires combine timeless lantern-inspired aesthetics with a sleek, modern twist, making it a standout choice for any outdoor setting. Its signature design and bold pyramidal roof creates a striking silhouette that adds architectural interest and style. With many customizable options, TEME perfectly balances classic charm with contemporary elegance.



Listings & Ratings

- ETL Listed to UL 1598 Standard for Wet Locations
- LED IP66 Rated

Electrical

- Electronic Driver-120-277V or 347/480V
- 0-10v Dimmable Driver
- Standard Surge Protection included (6kV) 10k-V available

LED

- LED light engine
- Kelvin Temperature -3000K, 4000K, 5000K
- 2700K and (1800K) Available

Distribution

- Types II, III, IV, V
- Full Cutoff

Warranty

- 5 Year Limited Warranty

Housing

- Cast Aluminum Housing & Stamped Cast Aluminum Roof.

Color Finish

- Super Durable Polyester Powder Coat Finish.
- Custom Finishes Available Including Patinas and All RAL Colors.

Mounting


- Standard Post Top
- Pendant Mount
- Wall Mount

Controls (Optional)

- Button Eye Photo Control
- House Side Shield

EPA:1.44

Weight 30 lbs (Max)

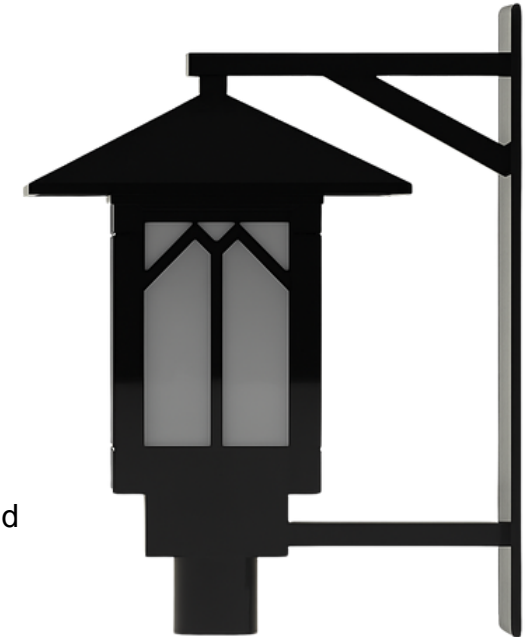


SPECIFICATION / ORDERING INFORMATION

Model	Lens	Wattage	CCT	Voltage	Optics	Mounting	Panes	Options	Finish
AF34XSANTAFE2	CA=Clear Acrylic CP=Clear Polycarbonate FA=Frosted Acrylic FP=Frosted Polycarbonate WA=White Opal Acrylic PA=Pattern Acrylic DA=Seeded Acrylic	10W=10w 15W=15w 20W=20w 30W=30w 40W=40w 50W=50w 60W=60w	3K=3000K 4K=4000K 5K=5000K	U=120-277V H=347/480V	2=Type II 3=Type III 4=Type IV 5=Type V	Standard Post Mount PEN=Pendant Mount WM=Wall Mount	NP=No Panes 4P=4 Panes 6P=6 Panes MP=Mini Panes AP=Arched Panes CP=Custom Panes	PC=Button Eye Photo Cell H=House Side Shield RG=Ring N=None	BK=Black BZ=Bronze DBZ=Dark Bronze WH=White GR=Green SM=Silver Metallic GY=Light Gray TBK=Textured Black CC=Custom Color


PHOTOMETRIC PERFORMANCE

Lumens Output for TME								
Wattage		10w	15w	20w	30w	40w	50w	60w
Diameter		6"	6"	6"	6"	8"	8"	8"
Input Watts		10.2	14.6	20.4	30.6	40.8	51.0	56.6
Otpic	CCT	DELIVERED LUMENS						
2 = Type II Clear, Frosted, or Ribbed Lens	3K	1,344	1,763	2,352	3,527	4,703	5,878	7,055
	4K	1,371	1,800	2,400	3,600	4,800	6,001	7,200
	5K	1,392	1,828	2,437	3,655	4,874	6,091	7,310
	BUG Rating	B0-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2
3 = Type III clear, Frosted, or Ribbed Lens	3K	1,342	1,760	2,348	3,521	4,695	5,869	7,043
	4K	1,369	1,797	2,396	3,595	4,792	5,991	7,188
	5K	1,390	1,825	2,433	3,649	4,866	6,081	7,298
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2
4 = Type IV Clear, Frosted, or Ribbed Lens	3K	1,312	1,721	2,296	3,443	4,591	5,739	6,887
	4K	1,339	1,758	2,343	3,515	4,686	5,858	7,029
	5K	1,359	1,784	2,379	3,569	4,758	5,947	7,136
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G2	B2-U3-G2	B2-U3-G2
5 = Type V Clear, Frosted, or Ribbed Lens	3K	1,373	1,801	2,402	3,603	4,804	6,005	7,207
	4K	1,401	1,839	2,452	3,678	4,903	6,130	7,355
	5K	1,423	1,867	2,489	3,734	4,979	6,222	7,467
	BUG Rating	B1-U2-G1	B1-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G1	B3-U3-G2
5 = Type V, with White-Opal Lens	3K	964	1,446	1,928	2,893	3,857	4,821	5,785
	4K	984	1,477	1,969	2,953	3,937	4,921	5,906
	5K	999	1,499	1,998	2,998	3,997	4,997	5,996
	BUG Rating	B1-U3-G1	B1-U3-G1	B1-U3-G2	B1-U4-G2	B1-U4-G2	B2-U4-G3	B2-U5-G3


6 Panel

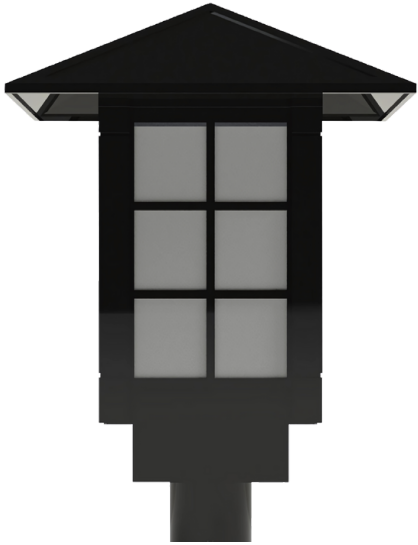

Arched Panel

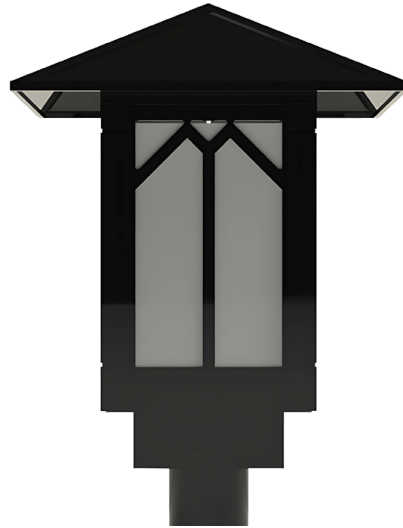


Custom Panel

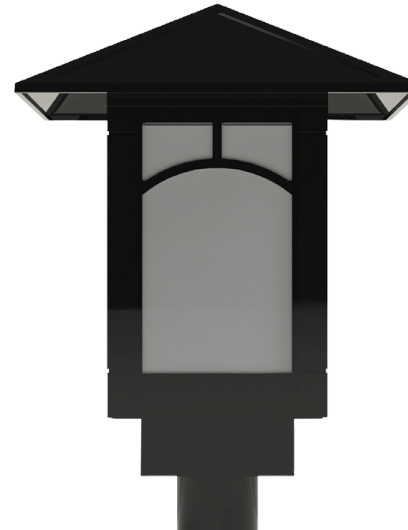

Custom Panel



Mini Panel

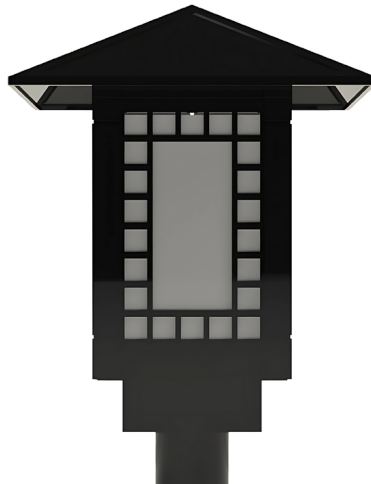

No Panel




4 Panel




DIMENSIONS


Post Mount with Ring

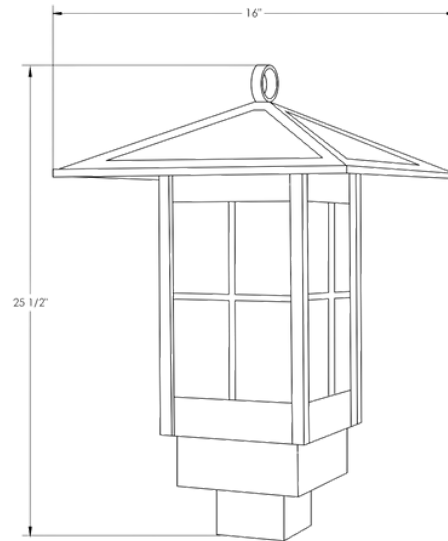

Post Mount

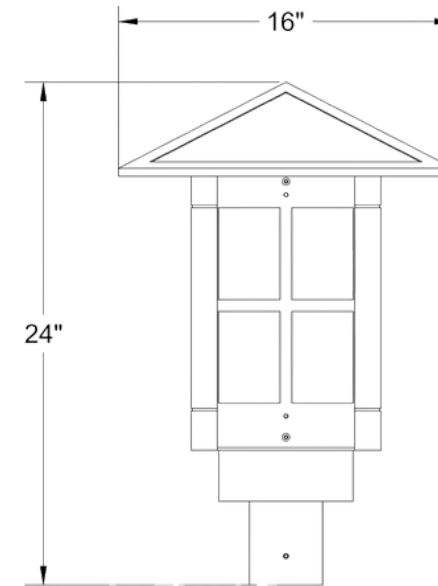

Swivel Stem Mount

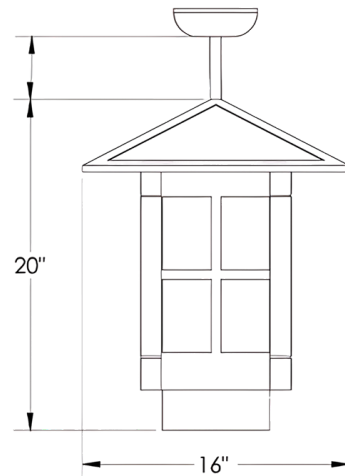

Chain Mount

